


SoundGuard™ Acoustic Panel System

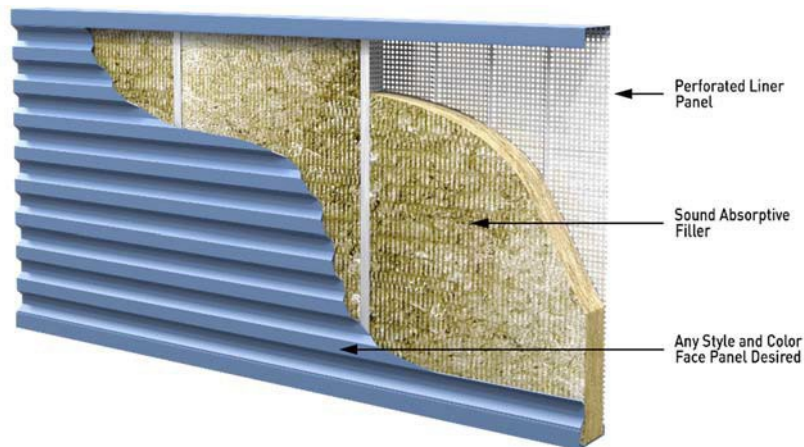

Description:

The SoundGuard™ Acoustic Panel System is a 4" thick sound attenuating barrier assembly designed for aesthetics as well as noise control. The outward facing panels of the system can be any desired material allowing uniformity of color, texture and profile with other elements of the building.

Material:

- Front panel: per customer specification.
- Rails and tracks: galvanized 16 ga steel.
- Absorptive material: mineral wool.
- Back panel: perforated Galvalume steel.

Application:

The SoundGuard™ system is engineered for acoustical enclosures and noise barriers where structural integrity, sound absorption and transmission loss are of major concern. SoundGuard™ panels are designed for outdoor applications. This acoustic panel system is engineered to be mounted over open framing such as the RoofScreen framing system or structural steel supports.

Exterior Panel Characteristics:

Panels used for the outward facing surface can be chosen from the entire list of panel types offered by RoofScreen. Face panels sourced elsewhere may also be used if they meet the structural properties required.

SoundGuard™ Acoustic Panel System

www.roofscreen.com

Updated 12.05.23

Mineral Wool Specifications:

Mineral Wool conforms to Federal Specifications HH-1-558B and ASTM Standard E-136 and has the following characteristics:

- Actual density of 6 pounds per cubic foot.
- Nominal density of 8 pounds per cubic foot.
- Is non-hygroscopic and absorbs less than 1% water.
- Melts above 2,000 Degrees Fahrenheit, has a flame spread of 15 or less and a smoke development of 0 when tested in accordance with ASTM Standard E-84, is rated incombustible by ASTM Standard E-136.

Acoustical Performance Standards:

Vertical Panels:

- Testing results show noise reduction coefficient (NRC) of 1.15 when measured in accordance with the requirements of ASTM C423.
- Testing results show sound transmission class (STC) rating of 38 when tested in accordance with the requirements of ASTM E90.

Horizontal Panels:

- Testing results show noise reduction coefficient (NRC) of 1.10 when measured in accordance with the requirements of ASTM C423.
- Testing results show sound transmission class (STC) rating of 32 when tested in accordance with the requirements of ASTM E90.

**NRC and STC values of Horizontal Panels can be increased to match those of Vertical Panels. Please contact us for further information.*

Perforated Panel Characteristics:

Material	Thickness	Hole Size	Hole Shape	Hole Centers	Hole Direction
Galvalume Steel	24ga	1/8"	Round	3/16"	Staggered

Warranty:

When RoofScreen provides project design and engineering calculations, a 20-year limited warranty is included.